

**Door, Sidelight & Stationary Panel Units, HEIGHT**

CALL SIZE (HEIGHT)	HEIGHT IN INCHES
6-8	79½
6-10	81½

**Door, Stationary Panel & Single Transom Units, WIDTH**

CALL SIZE (WIDTH)	2-6	3-0	4-0	5-0	6-0	8-0	9-0
Width in Inches	32	37 <sup>5</sup> / <sub>8</sub>	50 <sup>3</sup> / <sub>8</sub>	59 <sup>7</sup> / <sub>16</sub>	70 <sup>11</sup> / <sub>16</sub>	96 <sup>3</sup> / <sub>16</sub>	107 <sup>7</sup> / <sub>16</sub>

**Transom Units, HEIGHT**

CALL SIZE (HEIGHT)	HEIGHT IN INCHES
0-10	11 <sup>3</sup> / <sub>8</sub>
1-0	13 <sup>3</sup> / <sub>8</sub>
1-2	15 <sup>3</sup> / <sub>8</sub>
2-0	26 <sup>5</sup> / <sub>8</sub>
2-4	30 <sup>5</sup> / <sub>8</sub>


**Twin Transom Units, WIDTH**

CALL SIZE (WIDTH)	5-0	6-0	8-0
RIGHT SIDE (Width in Inches)	29 <sup>9</sup> / <sub>16</sub>	35 <sup>3</sup> / <sub>16</sub>	47 <sup>15</sup> / <sub>16</sub>
LEFT SIDE (Width in Inches)	29 <sup>9</sup> / <sub>16</sub>	35 <sup>3</sup> / <sub>16</sub>	47 <sup>15</sup> / <sub>16</sub>

**9-0 Triple Transom Units, WIDTH**

PANEL CONFIGURATION	LEFT	CENTER	RIGHT
SIA	36 <sup>15</sup> / <sub>16</sub>	34 <sup>7</sup> / <sub>8</sub>	35 <sup>1</sup> / <sub>16</sub>
SAI	36 <sup>15</sup> / <sub>16</sub>	34 <sup>7</sup> / <sub>8</sub>	35 <sup>1</sup> / <sub>16</sub>
AIS	35 <sup>1</sup> / <sub>16</sub>	34 <sup>7</sup> / <sub>8</sub>	36 <sup>15</sup> / <sub>16</sub>
IAS	35 <sup>1</sup> / <sub>16</sub>	34 <sup>7</sup> / <sub>8</sub>	36 <sup>15</sup> / <sub>16</sub>

**EXTERIOR VIEW OF DOORS**

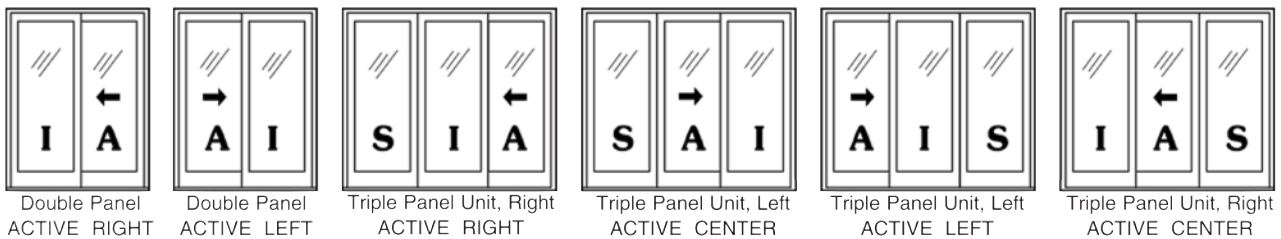

I=inactive panel

S=stationary panel

A=active panel.

**Door Units**

Call Size	Clear Opening Width	Clear Opening Height	Clear Opening S.F.	Daylight Opening S.F.
WDSP5068	22.469	76.438	11.93	24.5
50610	22.469	78.438	12.24	25.2
6068	29.000	76.438	15.39	30.0
60610	29.000	78.438	15.80	30.9
8068	41.750	76.438	22.16	42.7
80610	41.750	78.438	22.74	43.8
9068	29.000	76.438	15.39	45.1
90610	29.000	78.438	15.80	46.3

**Stationary Panel Units**

Call Size	Daylight Opening S.F.
WDSP2668	12.4
610	12.7
WDSP3068	15.1
610	15.6
WDSP4068	21.4
610	22.0

**Single Transom Units**

Call Size	Daylight Opening S.F.
WDSPTN26010	1.8
10	2.2
12	2.6
20	4.9
24	5.8
WDSPTN30010	2.2
10	2.7
12	3.1
20	5.9
24	6.9
WDSPTN40010	3.0
10	3.6
12	4.3
20	8.0
24	9.4
WDSPTN50010	3.5
10	4.3
12	5.1
20	9.5
24	11.1
WDSPTN60010	4.2
10	5.1
12	6.1
20	11.4
24	13.3
WDSPTN80010	5.8
10	7.1
12	8.4
20	15.7
24	18.3
WDSPTN9010	7.9
12	9.4
20	17.6
24	20.5


**Twin Transom Units**

Call Size	Daylight Opening S.F.
WDSPTN50010	1.7
10	2.0
12	2.4
20	4.5
24	5.3
WDSPTN60010	2.0
10	2.5
12	2.9
20	5.5
24	6.4
WDSPTN80010	2.8
10	3.4
12	4.1
20	7.6
24	8.9

**9-0 Triple Transom Units**

PANEL CONFIGURATION*	Call Size	Daylight Opening S.F.
S (stationary panel)	WDSPTN90010	2.1
	10	2.6
	12	3.1
	20	5.8
	24	6.7
I (inactive panel)	WDSPTN90010	2.0
	10	2.5
	12	2.9
	20	5.5
A (active panel)	WDSPTN90010	2.0
	10	2.4
	12	2.9
	20	5.4
	24	6.3

\* See opposite page for panel configuration explanation.

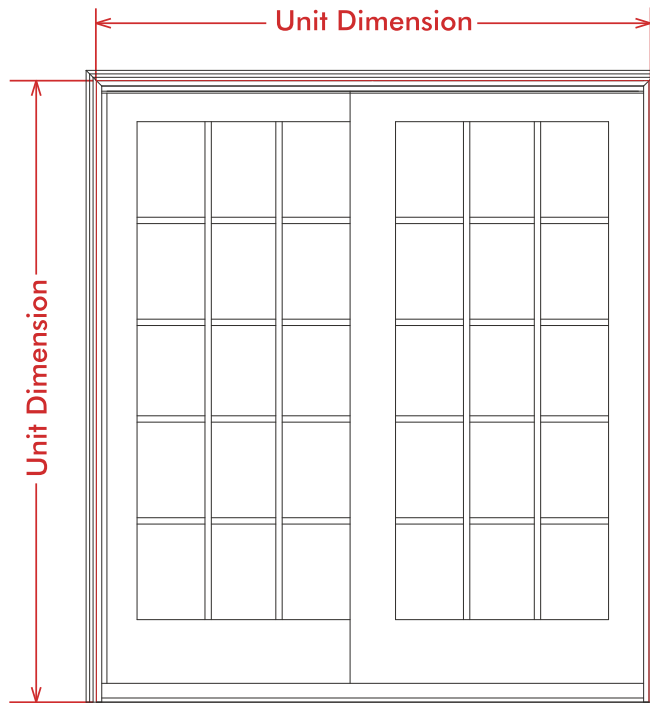

**Door, Sidelight & Stationary Panel Units, HEIGHT**

CALL SIZE (HEIGHT)	HEIGHT IN INCHES
6-8	79½
6-10	81½
8-0	95½

**Door & Stationary Panel Units, WIDTH**

CALL SIZE (WIDTH)	2-6	3-0	5-0	6-0	9-0
Width in Inches	32	37 <sup>5</sup> / <sub>8</sub>	59 <sup>7</sup> / <sub>16</sub>	70 <sup>11</sup> / <sub>16</sub>	107 <sup>5</sup> / <sub>8</sub>

**Single Transom Units, WIDTH**

CALL SIZE (WIDTH)	2-6	3-0	5-0	6-0	9-0
Width in Inches	32	37 <sup>5</sup> / <sub>8</sub>	59 <sup>7</sup> / <sub>16</sub>	70 <sup>11</sup> / <sub>16</sub>	107 <sup>7</sup> / <sub>16</sub>

**Transom Units, HEIGHT**

CALL SIZE (HEIGHT)	HEIGHT IN INCHES
0-10	11 <sup>3</sup> / <sub>8</sub>
1-0	13 <sup>3</sup> / <sub>8</sub>
1-2	15 <sup>3</sup> / <sub>8</sub>
2-0	26 <sup>5</sup> / <sub>8</sub>
2-4	30 <sup>5</sup> / <sub>8</sub>


**Twin Transom Units, WIDTH**

CALL SIZE (WIDTH)	5-0	6-0
RIGHT SIDE (Width in Inches)	29 <sup>9</sup> / <sub>16</sub>	35 <sup>3</sup> / <sub>16</sub>
LEFT SIDE (Width in Inches)	29 <sup>9</sup> / <sub>16</sub>	35 <sup>3</sup> / <sub>16</sub>

**9-0 Triple Transom Units, WIDTH**

PANEL CONFIGURATION	LEFT	CENTER	RIGHT
SIA	36 <sup>15</sup> / <sub>16</sub>	34 <sup>7</sup> / <sub>8</sub>	35 <sup>1</sup> / <sub>16</sub>
SAI	36 <sup>15</sup> / <sub>16</sub>	34 <sup>7</sup> / <sub>8</sub>	35 <sup>1</sup> / <sub>16</sub>
AIS	35 <sup>1</sup> / <sub>16</sub>	34 <sup>7</sup> / <sub>8</sub>	36 <sup>15</sup> / <sub>16</sub>
IAS	35 <sup>1</sup> / <sub>16</sub>	34 <sup>7</sup> / <sub>8</sub>	36 <sup>15</sup> / <sub>16</sub>

**EXTERIOR VIEW OF DOORS**

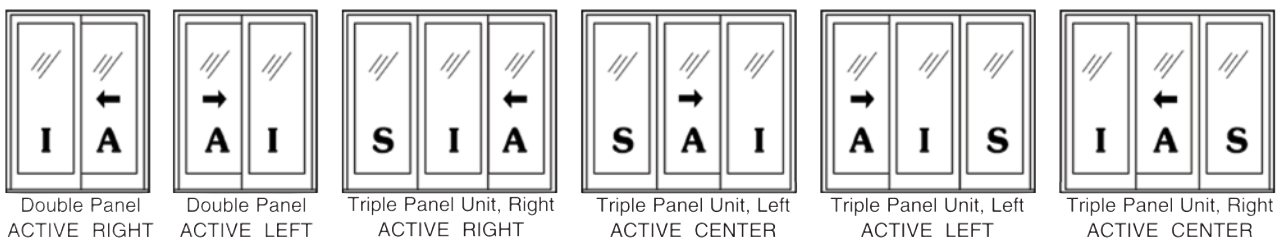

I=inactive panel

S=stationary panel

A=active panel.

**Door Units**

Call Size	Clear Opening Width	Clear Opening Height	Clear Opening S.F.	Daylight Opening S.F.
WDFS5068	22.000	76.438	11.68	19.1
50610	22.000	78.438	11.98	19.7
5080	22.000	92.438	14.12	23.9
6068	28.500	76.438	15.13	24.1
60610	28.500	78.438	15.52	24.8
6080	28.500	92.438	18.29	30.1
8068	22.000	76.438	11.68	36.1
80610	22.000	78.438	11.98	37.2
8080	22.000	92.438	14.12	45.2

**Stationary Panel Units**

Call Size	Daylight Opening S.F.
WDFS2668	9.6
610	9.9
80	12.0
WDFS3068	12.0
610	12.4
80	15.1

**Single Transom Units**

Call Size	Daylight Opening S.F.
WDSPTN26010	1.8
10	2.2
12	2.6
20	4.9
24	5.8
WDSPTN30010	2.2
10	2.7
12	3.1
20	5.9
24	6.9
WDSPTN40010	3.0
10	3.6
12	4.3
20	8.0
24	9.4
WDSPTN50010	3.5
10	4.3
12	5.1
20	9.5
24	11.1
WDSPTN60010	4.2
10	5.1
12	6.1
20	11.4
24	13.3
WDSPTN80010	5.8
10	7.1
12	8.4
20	15.7
24	18.3
WDSPTN9010	7.9
12	9.4
20	17.6
24	20.5

**Twin Transom Units**

Call Size	Daylight Opening S.F.
WDSPTN50010	1.7
10	2.0
12	2.4
20	4.5
24	5.3
WDSPTN60010	2.0
10	2.5
12	2.9
20	5.5
24	6.4
WDSPTN80010	2.8
10	3.4
12	4.1
20	7.6
24	8.9


**9-0 Triple Transom Units**

PANEL CONFIGURATION*	Call Size	Daylight Opening S.F.
S (stationary panel)	WDSPTN90010	2.1
	10	2.6
	12	3.1
	20	5.8
	24	6.7
I (inactive panel)	WDSPTN90010	2.0
	10	2.5
	12	2.9
	20	5.5
	24	6.4
A (active panel)	WDSPTN90010	2.0
	10	2.4
	12	2.9
	20	5.4
	24	6.3

\* See opposite page for panel configuration explanation.

**Door, Sidelight & Stationary Panel Units, HEIGHT**

CALL SIZE (HEIGHT)	HEIGHT IN INCHES
6-8	79½
6-10	81½
8-0	95½

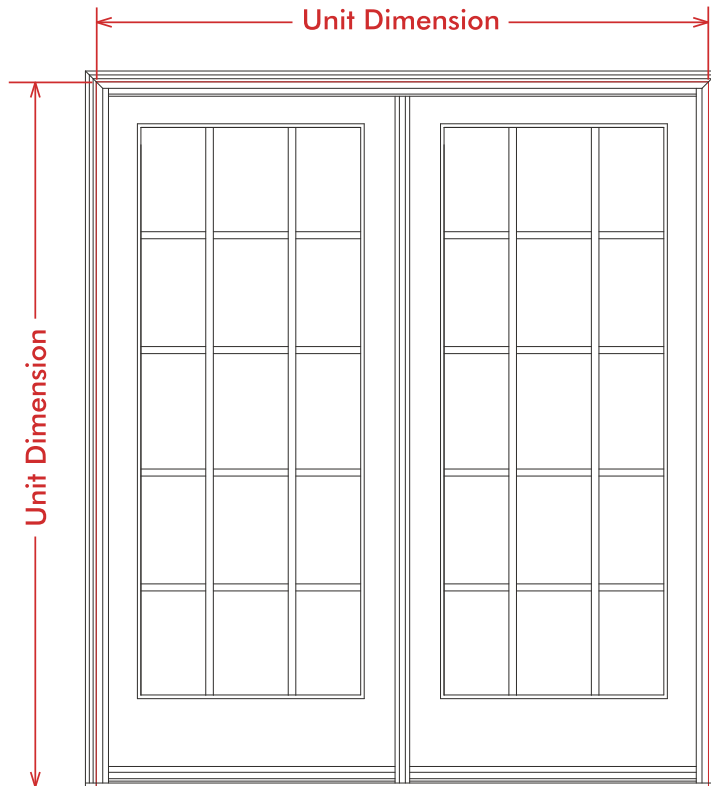

**Transom Units, HEIGHT**

CALL SIZE (HEIGHT)	HEIGHT IN INCHES
0-10	11¾
1-0	13¾
1-2	15¾
2-0	26⅝
2-4	30⅝

**Door, Stationary Panel & Single Transom Units, WIDTH**

CALL SIZE (WIDTH)	2-6	2-8	3-0	5-0	5-4	6-0	8-0	9-0
Width in Inches	30¾	32¾	35⅓	59⅙	63⅙	70⅙	94⅝	105⅙

**Twin Transom Units, WIDTH**

CALL SIZE (WIDTH)	5-0	5-4	6-0
RIGHT SIDE (Width in Inches)	29⅙	31⅙	35⅓
LEFT SIDE (Width in Inches)	29⅙	31⅙	35⅓

**8-0 Triple Transom Units, WIDTH**

PANEL CONFIGURATION	LEFT	CENTER	RIGHT
OXO	31⅙	30⅓	31⅙
XOO	30⅓	31⅙	31⅙
OOX	31⅙	31⅙	30⅓

**9-0 Triple Transom Units, WIDTH**


PANEL CONFIGURATION	LEFT	CENTER	RIGHT
OXO	35⅓	34⅙	35⅓
XOO	34⅙	35⅓	35⅓
OOX	35⅓	35⅓	34⅙

**EXTERIOR VIEW OF DOORS**

SINGLE PANEL WIDE



DOUBLE PANEL UNIT

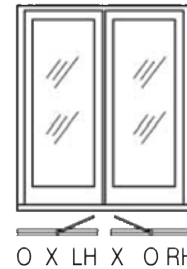

TRIPLE PANEL UNIT



O=Stationary panel  
 X= Operable panel  
 LH=Left hand swing  
 RH=Right hand swing

**Door Units**

**Stationary Panel Units**

Call Size	Clear Opening Width	Clear Opening Height	Clear Opening S.F.	Daylight Opening S.F.
WDHP2668X	27.531	76.313	14.59	8.7
26610X	27.531	78.313	14.97	9.0
2680X	27.531	92.313	17.65	10.9
WDHP2868X	29.531	76.313	15.65	9.6
28610X	29.531	78.313	16.06	9.9
2880X	29.531	92.313	18.93	12.0
WDHP3068X	33.156	76.313	17.57	11.2
30610X	33.156	78.313	18.03	11.5
3080	33.156	92.313	21.26	14.0
WDHP5068	27.531	76.313	14.59	17.4
50610	27.531	78.313	14.97	17.9
5080	27.531	92.313	17.65	21.8

Call Size	Clear Opening Width	Clear Opening Height	Clear Opening S.F.	Daylight Opening S.F.
WDHP5468	29.531	76.313	15.65	19.1
54610	29.531	78.313	16.06	19.7
5480	29.531	92.313	18.93	24.0
WDHP6068	33.156	76.313	17.57	22.3
60610	33.156	78.313	18.03	23.0
6080	33.156	92.313	21.26	28.0
WDHP9068	33.156	76.313	17.57	33.5
90610	33.156	78.313	18.03	34.6
9080	33.156	92.313	21.26	42.0

Call Size	Daylight Opening S.F.
WDHP2668	8.7
610	9.0
80	10.9
WDHP2868	9.6
610	9.9
80	12.0
WDHP3068	11.2
610	11.5
80	14.0

**Single Transom Units**

Call Size	Daylight Opening S.F.
WDSPTN26010	1.7
10	2.1
12	2.5
20	4.6
24	5.4
WDSPTN28010	1.8
10	2.2
12	2.7
20	5.0
24	5.8

Call Size	Daylight Opening S.F.
WDSPTN30010	2.1
10	2.5
12	3.0
20	5.6
24	6.5
WDSPTN50010	3.5
10	4.3
12	5.1
20	9.5
24	11.1

Call Size	Daylight Opening S.F.
WDSPTN54010	3.8
10	4.6
12	5.4
20	10.2
24	11.9
WDSPTN60010	4.2
10	5.1
12	6.1
20	11.4
24	13.3

Call Size	Daylight Opening S.F.
WDSPTN80010	5.7
10	7.0
12	8.2
20	15.4
24	18.0
WDSPTN90010	6.4
10	7.8
12	9.2
20	17.3
24	20.1

**Twin Transom Units**

Call Size	Daylight Opening S.F.
WDSPTN50010	1.7
10	2.0
12	2.4
20	4.5
24	5.3
WDSPTN54010	1.8
10	2.2
12	2.6
20	4.9
24	5.7
WDSPTN60010	2.0
10	2.5
12	2.9
20	5.5
24	6.4

**Triple Transom Units**

PANEL CONFIGURATION*	Call Size	Daylight Opening S.F.
XOO OR OOX	WDSPTN80010	1.8
	10	2.2
	12	2.6
	20	4.9
	24	5.7
OXO	WDSPTN80010	1.8
	10	2.1
	12	2.5
	20	4.8
	24	5.6

PANEL CONFIGURATION*	Call Size	Daylight Opening S.F.
XOO OR OOX	WDSPTN90010	2.0
	10	2.5
	12	2.9
	20	5.5
	24	6.4
OXO	WDSPTN90010	2.0
	10	2.4
	12	2.9
	20	5.4
	24	6.3

\* See opposite page for panel configuration explanation.